
EFFECT OF PROCESSING ON THE METALLURGICAL PROPERTIES OF LOW CARBON STEELS

Bhupender Singh

Assistant Professor

Department of Chemistry

Pt. N.R.S. Government College Rohtak

Haryana

ABSTRACT

As we know there is a little bit of steel in everybody life. Steel has many practical applications in every aspects of life. Steel with favorable properties are the best among the goods. The steel is being divided as low carbon steel, high carbon steel, medium carbon steel, high carbon steel on the basis of carbon content. Low carbon steel has carbon content of 0.15% to 0.45%. Low carbon steel is the most common form of steel as it's provides material properties that are acceptable for many applications. It is neither externally brittle nor ductile due to its lower carbon content. It has lower tensile strength and malleable. Steel with low carbon steel has properties similar to iron. As the carbon content increases, the metal becomes harder and stronger but less ductile and more difficult to weld.

KEYWORDS: low carbon steel, material, metal.

INTRODUCTION

The steels generally used in the automobile, railways and construction industries are as given below:

- Cold Formed Steels.
- Carbon Steels.
- Alloy Steels.
- Free Cutting Steels.
- Spring Steels.
- Rust resisting and Stainless Steels.

Among these steels the cold formed steel having 0.06 to 0.15 percent of carbon, ie, the Cold reduced low carbon steel sheets and strips are mostly used in the manufacture of automobile parts and body shell, since the CRS possesses good formability and produces components of good surface finish. The cold reduced low carbon steel, conforming to IS 513:2008 comprises of four grades namely, CR1, CR2, CR3, CR4 and CR5. The CR1 is the commercial grade, CR2 is used for drawing applications and the CR3, CR4 and CR5 grades are used for deep drawing applications. In spite of its application in industries, the work reported in literature is meager. The low carbon steel after cold rolling process is subjected to increase in hardness due to the work hardening effect of the cold rolling process.

Hence it is not suitable for further processing to manufacturing of automobile components by forming process. Therefore it is subjected to reduction of hardness by annealing, carried out mostly by excluding oxygen from the annealing furnace at a temperature of 680 °C for 24 hours, in order to prevent the surface of the steel losing its bright appearance. The annealing heat causes the steel coils to buckle and distort. Therefore these annealed coils are de-coiled and rolled in temper mill with special textured work rolls.

The properties influencing the forming/rolling of low carbon steel and CRS is its ductility. The ductility/formability of steel is dependent on crystal structure, grain size, and temperature during rolling and heat treatment; type of heat treatment and the alloying elements present in the steel. Generally the presence of FCC crystal structure is preferable for achieving good ductility. The cold rolling yields elongated or distorted grains, more than in the hot rolling process and hence the cold rolling results in loss of ductility.

The cold reduced low carbon steels can be rolled with ease due to its low carbon content which is available to interfere with the slip planes. During the cold rolling of cold reduced low carbon steel enormous pressure is applied through the rolling mills, which causes the distortion of the crystals and thus the presence of large grains that permit heavy drawing/rolling.

LOW CARBON STEEL

Low carbon steel has carbon content of 1.5% to 4.5%. Low carbon steel is the most common type of steel as its price is relatively low while it provides material properties that are acceptable for many applications. It is neither externally brittle nor ductile due to its low carbon content. It has lower tensile strength and malleable.

HEAT TREATMENT

The process of heat treatment is carried out first by heating the material and then cooling it in the brine, water and oil. The purpose of heat treatment is to soften the metal, to change the grain size, to modify the structure of the material and to relieve the stress set up in the material after hot and cold working.

The various heat treatment processes commonly employed in engineering practice as follows:-

ANNEALING SPHERODIZING

Spheroidite forms when carbon steel is heated to approximately 700 for over 30 hours. The purpose is to soften higher carbon steel and allow more formability. This is the softest and most ductile form of steel. Here cementite is present.

FULL ANNEALING

Carbon steel is heated to approximately above the upper critical temperature (550-650) for 1 hour. Here all the ferrite transforms into austenite. The steel must then be cooled in the realm of 38 per hour. This results in a coarse pearlite structure. Full annealed steel is soft and ductile with no internal stress.

PROCESS ANNEALING

The steel is heated to a temperature below or close to the lower critical temperature (550-650), held at this temperature for some time and then cooled slowly. The purpose is to relieve stress in a cold worked carbon steel with less than 0.3% wt c.

DIFFUSION ANNEALING

The process consists of heating the steel to high temperature (1100-1200). It is held at this temperature for 3 hours to 20 hours and then cooled to 800-850 inside the furnace for a period of about 6 to 8 hours. It is further cooled in the air to room temperature. This process is mainly used for ingots and large casting. It is also called isothermal annealing.

STUDIES ON MICROSTRUCTURAL GROWTH, TEXTURE AND ORIENTATION

Alan J. Heckler and W.G. Granzow conducted crystallite orientation distribution analysis on cold rolled and recrystallization textures in low carbon steels. In this investigation 60 percent reduced cold rolled low carbon steels were studied and found that during early stages of recrystallization the fibre textures decreased and after the complete recrystallization and grain growth there was increase in the fiber texture of the grains, which is desirable since it is useful in drawing/rolling of low-carbon steel. Z. Larouk, H. Bouhalais, studied the nucleation and growth kinetics of low carbon steel, their activation energy and the grain size after complete recrystallization. The grain refinement of the ferrite grains after the complete recrystallization yields good mechanical properties. It was observed that the activation energy for primary recrystallization is higher for highly deformed low carbon steel wires. R. L. Every and M. Hatherly, investigated the presence and effect of preferred orientations in hot-rolled, cold-rolled (70% reduction) and annealed low-carbon steels

(capped and aluminium-killed grades). The presence of oriented nucleations during the early stages of recrystallization occurring in highly strained lattice regions, influence and decide the orientation and texture developed in the final processed steel. Seshadri Seetharaman, discussed in his book, the inherent property of HSLA steel to inhibit the recrystallisation. This virtue is utilised in controlling the rolling process of HSLA steel making and thus achieve heavily deformed/misoriented austenite grains. The phase transformation further yields a fine ferrite grain size and good mechanical properties.

STUDIES ON SOAKING TIME

The cold drawing of low carbon steel lends to increase in strength, reduction in ductility and increase in hardness due to work hardening/strain hardening. During cold working the dislocations in the structure start to move and cause further formation of new dislocations leading to a deformed structure having anisotropy of mechanical properties.

The annealing of the cold drawn low carbon steel alters the microstructure and improves the ductility. Nurudeen Adekunle Raji and Oluleke Olugbemiga Oluwole conducted annealing experiments at 900°C, to study the effect of soaking time during the annealing process, on the mechanical properties of cold-drawn low carbon steel. Initially between 10 minutes to 30 minutes soaking time the stress relief occurs. Later between 30 minutes and 40 minutes soaking time, the recrystallization and formation of new austenitic-nucleating grains initiates. The microstructure is shown in Figure-1.

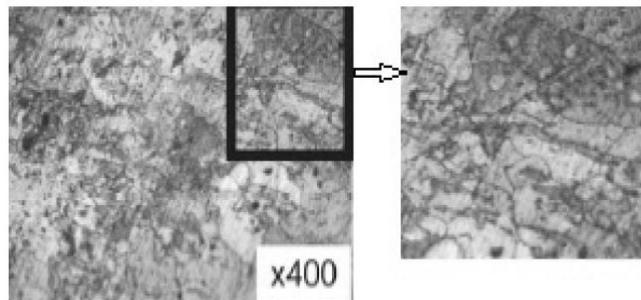


Figure-1. Microstructure of cold drawn low carbon steel showing formation of new austenitic – nucleating grains

The complete austenitization of the grains where in the carbon goes into the solid solution occurred during 40 minutes and 60 minutes soaking time. These metallurgical changes influence the mechanical properties and are evident in the observation wherein till 60 minutes of soaking time the tensile strength, impact strength, showed a decreasing trend and after 60 minutes these mechanical properties started to increase. Similarly the ductility reduced till 40 minutes and increased till 60 minutes of soaking time.

Chiaki Ouchi, studied the development of quenching processes in the hot rolling of HSLA steel plates by the use of Thermo-Mechanical Processing (TMP) and Direct Quenching (DQ) Processes. I. Schindler, *et al*, investigated the influence of cold rolling and annealing on mechanical properties of HSLA steel. They observed that the grain size obtained from the previous cold reduction process and the following annealing process parameters greatly influence properties of HSLA strips, as the annealing temperature increases the strength reduces.

STUDIES ON FORMABILITY/DRAWING

Salunkhe Ujwala Sunil and K.Baba Pai carried out Erichsen cupping experiment to study the formability of low carbon steel sheets of CR1, CR2, CR3 and CR4 grades of Cold Reduced Close Annealed Steel (CRCA) conforming to IS 513:2008 standards. The investigators observed that the CR4 grade low carbon steel by virtue of having bigger size grains, associated with low grain boundary area and hence have less grains density. This aids the CR4 steel to have less carbon percentage and which further compliments to making the steel to be softer, ductile in nature and less stress during rolling.

Hence the study indicates that CR4 grade of cold drawn low carbon steel has superior formability compared

to the other three grades of steel. N.A.Raji and O.O.Oluwole, studied the manufacturing of nails from coils of low carbon steel through cold drawing process. The investigators studied the effect of cold drawing on the mechanical properties of low carbon steel used in the manufacturing of nails. The microstructural investigations revealed the grains elongate in the direction of cold drawing deformation and increases with increasing degree of deformation. The misorientation of grain increases with severe plastic deformation, which contributes to the anisotropic nature in the mechanical properties of the low carbon steel. C.Capdevila, C.Garcia-Mateo, F.G.Caballero and C.Garcia de Andres developed a neural network model to represent the optimization by compromising between ultimate tensile strength and elongation of low carbon steel sheets. In this model around 21 parameters like chemical composition, thermochemical processes, etc. were considered for various forming operation. Amitkumar R Shelar, *et al*, used experimental and Finite Element Analysis (FEA) to optimize and minimize the damage involved in sheet metal forming. The investigators optimized the sheet metal process to produce sheet metal without wrinkle defects.

STUDIES ON WELDING

The welding related studies have revealed that possibility of occurring large thermal stresses in dissimilar metal weld joints due to difference in thermal expansion during temperature fluctuations. Kluech et al. has highlighted that the metallurgical changes including carbon transformation and carbon precipitation at the grain boundaries caused due to thermal stresses. Besides lot of studies have been done regarding effect of hardness changes on mechanical properties of the dissimilar weld joints. The welding between dissimilar metals, viz, between DSS/CRS yielded good quality joints as shown in Figure-2.

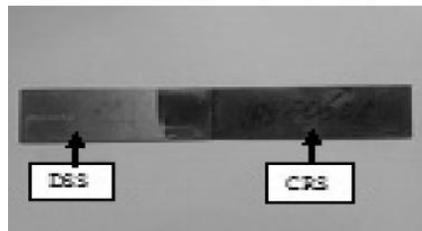


Figure-2. DSS/CRS tensile specimen .

Ultimate tensile strength (299Mpa) is high compared to yield strength (217Mpa) and breaking load (9KN). This indicates that the mechanical properties of DSS/CRS weld metal joint are able to meet functional requirement of the application. Similarly the hardness shows decreasing trend from weld metal to CRS Base Metal (BM) through CRS Heat Affected Zone (HAZ). This indicates that hardness in weld metal i.e. Fusion Zone is high when compared to CRS HAZ and CRS BM. DSS/CRS weld metal joint hardness survey results revealed that strength of the Fusion Zone (FZ), DSS Base Metal (BM) and DSS Heat Affected Zone (HAZ) is high when compared to CRS HAZ and CRS BM area [27] Figure-3.

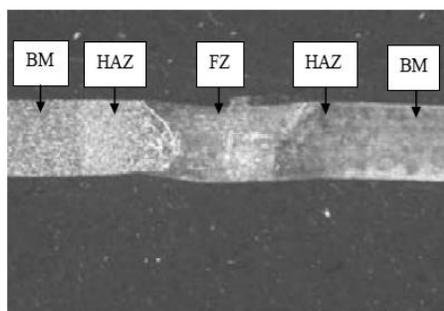


Figure-3. Macro structure DSS/CRS at magnification: 10x

The Macro analysis of the dissimilar welded joint specimen revealed complete weld fusion as shown in Figure-3. M. Sadeghian, M. Shamanian and A. Shafyei investigated the effect of heat input on microstructure

and mechanical properties of dissimilar welding between Super Duplex Stainless Steel (SDSS) and High Strength Low Alloy steel (HSLA) using Gas Tungsten Arc Welding (GTAW). They observed that an increase in the heat input used in the GTAW process caused a decrease in the percentage of ferrite. The impact tests revealed that the specimen with low heat input exhibited brittle fracture. D. Devakumar, D. B. Jabaraj, V. K. Bupesh Raja, investigation the microstructural and mechanical properties of similar and dissimilar metal welded between Duplex Stainless Steel (DSS)/Duplex Stainless Steel (DSS) and Duplex Stainless Steel (DSS)/Corten-A steel (HSLA Steel). These welded joints were fabricated by Gas Tungsten Arc Welding (GTAW) process and yielded good quality weldments. Robert A. Weber, Bruce R. Somers, and Eric J. Kaufmann, studied the application and disadvantages of using low carbon age hardenable steels, i.e., High Strength Low Alloy Steel (HSLA) in Construction industry. They observed that the Post Weld Heat Treatment (PWHT) should be avoided because HSLA is prone to reheat cracking. A.K. Lakshminarayanan, V.E. Annamalai, K. Elangovan, investigated the Friction Stir Welding (FSW) of low carbon steel used in automobile industry. They observed that dwell time, rotational speed and plunge depth influenced the joint properties. Also they optimized the FSW process parameters to achieve maximum lap shear tensile strength by utilizing optimization techniques, viz, numerical and graphical techniques.

CONCLUSIONS

The low carbon Steels have good potential to be a cheap and effective raw material for making whole body shell and the various parts of automobiles, due to the virtue of their ease of formability. Most of the investigators have studied the process parameters like soaking time, annealing temperature to reduce the cold work induced anisotropy in the mechanical and metallurgical properties of CRS, HSLA and HRS Steels. It is obvious from the literature that these steels can be engineered to produce favorable microstructure, grain size and grain orientation, to achieve good formability and good surface finish.

REFERENCES

1. Alberto Moreira Jorge Junior, luiz Henrique Guedes and Oscar Balancin. 2012. Ultra Grain refinement during the simulated thermomechanical-processing of low carbon steel, *Journal of Materials Research and Technology*, Vol. 3, No. 3, pp. 141-147.
2. Andrew Livesey and A. Robinson. 2013. *The Repair of Vehicle Bodies*, Routledge, Sixth Edition. ISBN: 978-0-203-07547-0.
3. Chiaki Ouchi. 2001. Development of Steel Plates by Intensive Use of TMCP and Direct Quenching Processes, *ISIJ International*, Vol. 41, No. 6, pp. 542– 553.
4. D. Devakumar, D. B. Jabaraj and V. K. Bupesh Raja, 2015. Literature review on the effect of processing on the Mechanical and metallurgical properties of low carbon Steels, Vol. 10, no. 11, June 2015, ISSN 1819-6608.
5. I. Schindler, M. Janošec, E. Místeký, M. Růžek, L. ěík, L.A. Dobrzański, S. Ruzs and P. Suchánek. 2009. Effect of cold rolling and annealing on mechanical properties of HSLA steel, *Archives of Materials Sciences and Engineering, International Scientific journal*, Vol. 36, No. 1, March, pp. 41-47.
6. Indian Standards. Cold Reduced Low Carbon Steel Sheets and Strips, Fifth Revision, IS 513: 2008, New Delhi, April 2008.
7. J. Heslop and N. J. Petch. 1958. The ductile-brittle transition in the fracture of α iron, II, *Phil. Mag.* Vol.3, pp. 1128-1136
8. J. P. Kaushish. 2010. *Manufacturing Processes*, Prentice Hall of India Pvt. Ltd, Second Edition. ISBN:978-81-203-4082-4.
9. Nurudeen Adekunle Raji and Oluleke Olugbemiga Oluwole. 2012. Effect of Soaking Time on the Mechanical Properties of Annealed Cold-Drawn Low Carbon Steel, *Materials Sciences and Applications*, Vol. 3, pp. 513-518.
10. R. L. Every and M. Hatherly. 1974. Oriented Nucleation In Low-Carbon Steels, *Texture*, Vol. 1, pp. 183-194.
11. R. Z. Valiev. Investigations and applications of severe plastic deformation, *NATO Sci., Series 3*, 80, pp. 221-231.
12. Rintaro Ueji, Nobuhiro Tsuji, Yoritoshi Minamino and Yuichiro Koizumi. 2004. Effect of rolling reduction on Ultra-Fine Grained structure and mechanical properties of low-carbon steel thermomechanically processed from martensite starting structure, *Science and Technology of Advanced Materials*, Vol. 5, pp.153-162.
13. Seshadri Seetharaman. 2005. *Fundamentals of Metallurgy*, Woodhead Publishing Ltd, ISBN-10: 1-85573-927-5.
14. T. S. Wang, Z. Li, B. Zhang, X. J. Zhang, J. M. Deng and F. C. Zhang. 2010. High tensile ductility and high strength in ultrafine-grained low-carbon steel, *Materials Science and Engineering*, Vol. 527, pp.2798-2801.
15. Yong Gan. 2011. *Advanced Steel and Our Society: Better Steel, Better World*, DOI: 10.1007/978-3-642-17665-4_1, Springer -Verlag Berlin Heidelberg and Metallurgical Industry Press.
16. Z. Larouk, and H. Bouhalais. 2009. Recrystallization behavior of a low carbon steel wire, *Physics Procedia*, Vol. 2, pp. 1223-1229.