

Use of Aniline Green as Photosensitizer in liquid phase dye sensitized photogalvanic cell (Aniline Green-Ascorbic acid-Ammonium lauryl sulphate system) for solar power generation and storage

Dr. Bhagwan Sahay Bairwa¹, Poonam Swami^{2*}, Dr. Ajay Kumar Meena³

¹Commissionerate College Education Jaipur, Rajasthan, India

^{2,3}Department of Chemistry, Government P.G. college Tonk- 342005, India

E-mail: poonam.10jan@gmail.com

Abstract

The object of the research work is to study photogalvanic effect in Aniline green dye – ALS surfactant combination for enhancement of electrical output in photogalvanic cell. The photogalvanic effect studied in Aniline green-Ascorbic acid-ALS system. Here Ascorbic acid is used as a reductant, Aniline green dye act as photo sensitizer and Ammonium lauryl sulphate acts as a surfactant in aqueous solution. Electrical Parameter like photopotential and photocurrent is generated 881 mV and 824 μ A respectively. The power generated from the system is 80.85 μ W at its power point. The conversion efficiency of system is 0.77 % and fill factor is 0.0938. The cell works one hour 50 minutes in dark. A mechanism is also purposed for photo generation of electricity. i-V characteristic of the cell also studied.

Key words: Photopotential, photocurrent, i-V characteristics, photogalvanic effect (PGE), fill factor, Ammonium lauryl sulphate (ALS) conversion efficiency.

1. Introduction

The world energy demand is increasing tremendously, these results in higher consumption of fossil fuels, which severely damaged our environment. Energy and environment issues are closely linked with each other. Today we need renewable, cost effective, environment benign energy resources. Solar energy is most promising solution of all these, it is cheap, easily available and pollution free. Solar energy can be converted into electrical energy using solar cells like photo voltaic and photogalvanic cell. Photogalvanic cell has potential to replace existing solar cell due to its low cost and inbuilt storage capacity. Photogalvanic cell are based on photo galvanic effect or Bequeral effect in which the effect of light results in photo chemical process in the solution of electrolyte. These are galvanic cell induced by light, absorption of light results in generation of higher energy products which subsequently undergoes redox reaction to produce current. The photogalvanic cell is firstly reported by Rideal and William¹. It was systematically investigated by Rabinowitch²⁻³ using thionine iron system. Photogalvanic effect in Iron (II) poly (N-acrylaminomethyl-thionine) studied by Tamilarasan and Natrajan⁴. Murthy A.S.N. and Reddy K.S.⁵ Studies on photogalvanic effect in system containing Toluidine blue. Rohatgi-Mukherji K.K et al.⁶ have studied on Photovoltage Generation of the Phenosafranine Dye-EDTA Sandwich Cell. Ameta S.C. et al.⁷⁻⁸ have also developed some interesting photogalvanic cells. Gangotri K.M. et al⁹⁻¹⁰ have increased the electrical output as well as storage capacity up to reasonable mark by using various photosensitizer with micelles in photogalvanic cell. Meena R.C. and Singh G.¹¹ have reported the use of dyes and reductants in photogalvanic cell for solar energy conversion and storage. The effect of heterocyclic dyes and photogalvanic effect in photogalvanic cells for solar energy conversion and storage was studied by Genwa K.R. and Chouhan A.¹² Genwa K.R. and Sonel A.¹³ studied an approach to solar energy conversion and stoage with Toluidine Blue- Arabinose- CPC system. Genwa K.R. and Kumar A.¹⁴ studied an approach to solar energy conversion and storage with Nile blue-NaLS system and Thiazine dye-anionic surfactant system. Genwa et al.¹⁵ have reported the Ascorbic acid-Crystal

violet-Dioctyl sulphosuccinate (DSS) system in photogalvanic cell for study energy efficiency of the cell. Genwa K. R. and Singh K.¹⁶⁻¹⁸ have reported reasonable values of electrical output with different dyes i.e. Brilliant Blue-FCF (BB-FCF), Lissamine green-B (LGB) and Bromocresol green (BCG) as photosensitizers in photogalvanic cells for solar energy conversion and storage. Genwa K. R. and Sagar C. P.¹⁹ invented photogalvanic behaviour of Xylidine ponceau dye in Xylidine ponceau – Tween 60 – Ascorbic acid system. Rathode et al.²⁰⁻²¹ and Yadav et al.²²⁻²⁴ have recently developed some photogalvanic systems for solar energy conversion and storage. The scientific society has used different photosensitizers, surfactants, reductants in photogalvanic cells for conversion of solar energy into electrical energy but no attention has been paid to the use of this system containing Aniline green cationic dye as energy material to increase the electrical output and performance of the photogalvanic cell. Therefore, the present work was undertaken to obtain better performance and commercial viability of the photogalvanic cell.

2. Experiment method

Aniline green dye, ethylene Ascorbic acid, Ammonium lauryl sulphate and NaOH were used in the present work. Stock solutions were prepared in double distilled water. Stock solution of Aniline green (19×10^{-6} M), reductant Ascorbic acid (13×10^{-4} M), surfactant ALS (14×10^{-4} M) were used and 1M NaOH was added for maintaining pH in alkaline range. During preparation of the dye solution the precaution was taken to protect the solution from light and to store it in a dark coloured container. 25 ml of a mixture having a known volume of dye, reductant, surfactant and NaOH solution of different concentrations was taken into a blackened H shaped glass tube. A platinum foil electrode (1.0 cm^2) was immersed in one limb of the cell container containing a transparent window. The counter electrode SCE was placed in another limb. The pH of the solution was adjusted and measured by a pH meter. When the cell attained a stable potential in dark the Pt foil electrode was exposed to light source (tungsten lamp). A water filter was placed between the light source and the cell to cut-off thermal radiation. Electrical outputs of the cell like potential and current were measured with a digital multimeter (HAOYUE DT830D). The photogalvanic cell set-up is shown in Figure 1.


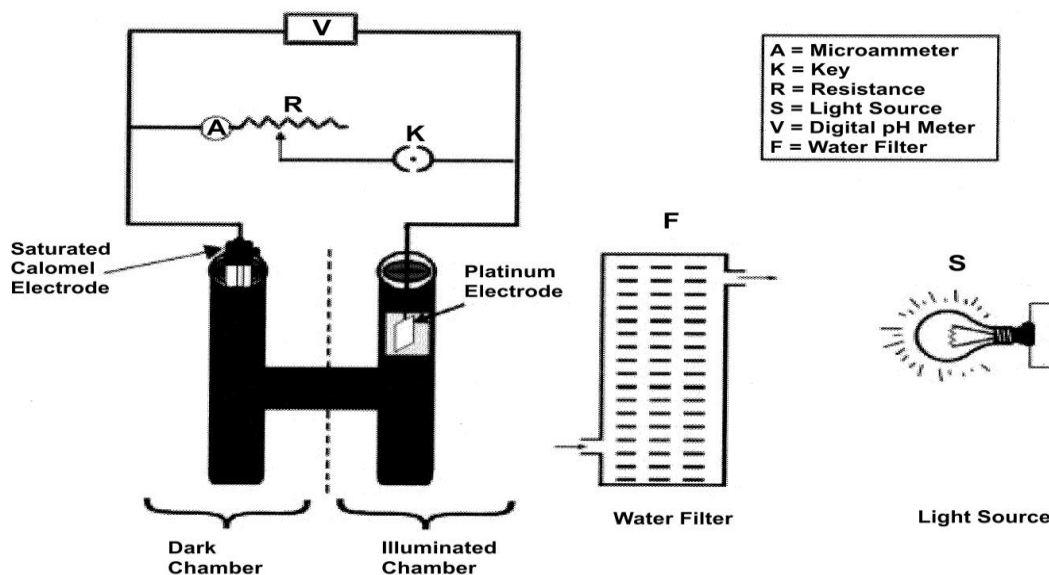


Fig-1: Experimental set up of photogalvanic cell


3. Mechanism of photovoltage and photocurrent generation in a cell

When dye is excited by the light in the presence of electron donating substance (reductant), the dye is rapidly changed into colourless form. The dye now acts as a powerful reducing agent and can donate electron to other substance and reconverted to its oxidized state. On the basis of earlier studies a tentative mechanism in the photogalvanic cell may be proposed as follows:

Illuminated chamber: On irradiation, dye molecules get excited.



The excited dye molecules accept an electron from reductant and converted into semi or leuco form of dye, and the reductant into its excited form.




At Pt-electrode:

The semi or leuco form of dye loses an electron and converted into original dye molecule.



Dark Chamber:


At counter electrode:



Finally leuco/semi form of dye and oxidized form of reductant combine to give original dye and reductant molecule. This cycle of mechanism is repeated again and again leading production of current continuously.



Here Dye, Dye*, Dye⁻, R and R⁺ are the dye, its excited form, leuco form, reductant and its oxidized form, respectively. The scheme of mechanism is shown in Fig.2

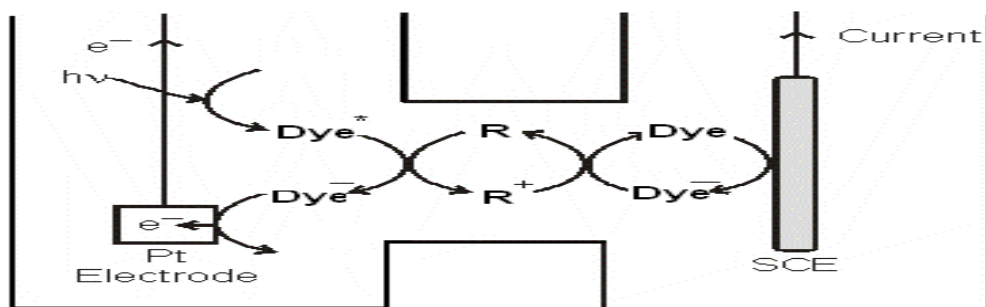

SCE = Saturated calomel electrode
R = Reductant

D = Dye (Photosensitizer)
D⁻ = Semi & Leuco form

Fig. 2 Scheme of mechanism

4. Result and Discussion

(a) Variation of photovoltage and current with time

Initially the whole system was placed in the dark, potential generated in the photogalvanic cell was found to change with time, after some time it attained a stable potential and then the Pt-electrode was exposed to the tungsten lamp. It was observed that the potential increased on increasing illumination, which was due to the increase in number of excited dye molecule and their conversion into semi or leuco form after accepting the electron from reductant, and it reached a maximum constant value after a certain period of illumination. This maximum potential is termed V_{max}. When the light source was removed, the direction of potential was reversed and a stable potential was again obtained after some time. There was a rapid rise in the photocurrent of the photogalvanic cell on illumination and it reached a maximum value within few minutes. This maximum

value current was denoted by I_{max} . The current was found to decrease gradually with the period of illumination and finally reached a constant value at equilibrium. This value is represented as I_{eq} shown in figure3 and 4.

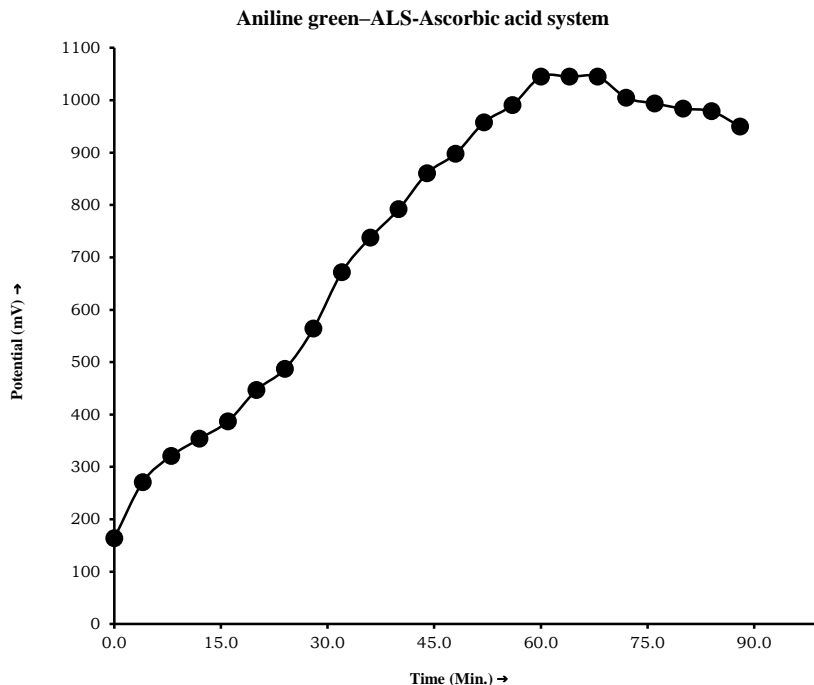


Fig. 3 VARIATION OF POTENTIAL WITH TIME

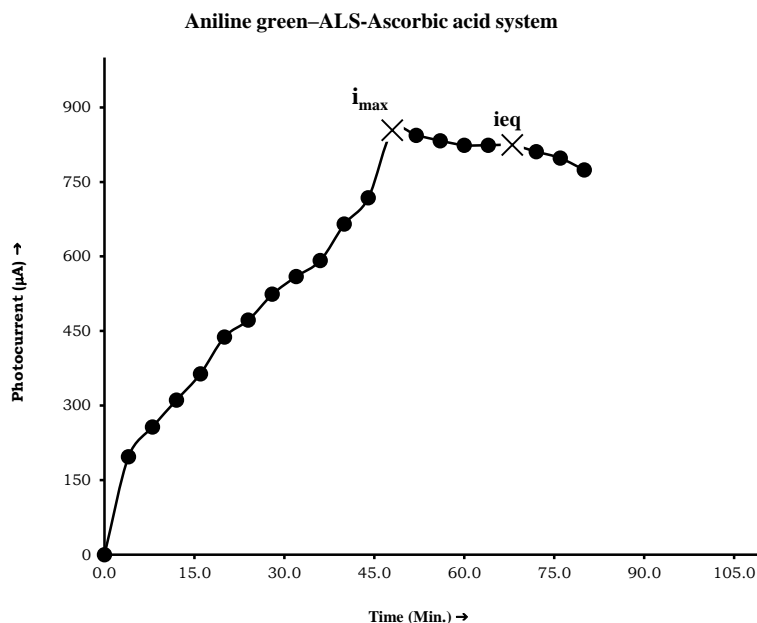


Fig. 4 VARIATION OF PHOTOCURRENT WITH TIME

(b) Effects of dye (Aniline green), reductant (Ascorbic acid) and surfactant (ALS) concentration on electrical output of photogalvanic cell

The effect of variation of dye Aniline green, reductant Ascorbic acid and surfactant ALS concentration are given in table 1, 2 and 3. Aniline green - Ascorbic acid -ALS system showed the best efficiency at the dye concentration of 19×10^{-6} M. It was observed that as the dye concentration was increased, the photopotential and photocurrent increased to a maximum value at this concentration and decreased on further increase in dye concentration. At low concentration of dye there was less number of excited dye molecule which donate electrons to the Pt-electrode, whereas at higher concentration density of dye molecules in the path of Pt-electrode was high, so light does not reach up to those dye molecules which are close to the Pt-electrode which resulted in the low electrical output. With an increase in reductant (Ascorbic acid) concentration the electrical output increased and reached a maximum value at a particular concentration (13×10^{-4} M) of reductant. On further increase in reductant concentration the electrical output decreased. At lower concentration of reductant less number of molecules were available for electron donation to excited dye molecule so electron output is low and at higher concentration of reductant large no of reductant molecules hinders the dye molecule to reach the electrode within a required time period, as the excited species is short lived. It has been studied that pKa values of the reductant must be lower than the pH of the system. The cell output increased with an increase in surfactant concentration (ALS) but after achieving a particular value, the electrical output of the cell started decreasing. The maximum electrical parameter was obtained at a DSS concentration of 14×10^{-4} M. On further increasing the concentration of surfactant decrease in electrical output was also observed. ALS not only assists in solubilisation of dye molecule but also stabilize the system with respect to electrical output. In this system we use Aniline green dye a basic dye which remain in the solution in cationic form, ALS is an anionic surfactant so there is the possibility of forming of charge transfer complex, which increases the electrical output of the Photogalvanic cell.

Table- 1

Effects of Aniline green concentration on electrical output of photogalvanic cell

Aniline green–Ascorbic acid–ALS system	[Aniline green] x 10^{-6} M				
	15	17	19	21	23
Photopotential in mV	645.0	737.0	881.0	763.0	644.0
Photocurrent in μA	612.0	691.0	824.0	747.0	627.0
Power in μW	394.74	509.26	725.94	566.90	403.78

Table- 2

Effects of Ascorbic acid concentration on electrical output of photogalvanic cell

Aniline green–Ascorbic acid–ALS system	[Ascorbic acid] x 10^{-4} M				
	09	11	13	15	17
Photopotential in mV	559.0	772.0	881.0	777.0	584.0
Photocurrent in μA	574.0	734.0	824.0	748.0	581.0
Power in μW	320.87	566.65	725.94	581.20	339.30

Table- 3

Effects of Ammonium lauryl sulphate concentration on electrical output of photogalvanic cell

Aniline green–Ascorbic acid–ALS system	[ALS] x 10 ⁻⁴ M				
	10	12	14	16	18
Photopotential (mV)	653.0	776.0	881.0	765.0	672.0
Photocurrent (μA)	674.0	771.0	824.0	751.0	652.0
Power (μW)	440.12	598.30	725.94	574.52	438.14

(c) Effect of pH variation

It was observed that the photopotential and photocurrent of the Aniline green–Ascorbic acid–ALS system increased and reached the maximum at pH 11.65 and then decreased with an increase of pH value. It was found that the optimum electrical output obtained at a particular pH value might be caused by better availability of reductant donors formed at that pH value. It was also observed that in an acidic medium the efficiency of the cell was poor. It might be due to proton attachment to the dye and reductant molecules, which resulted in poor electron donating power of the dye and reductant molecules to the platinum electrode. Effect of pH on electrical parameters depicted in figure 5.

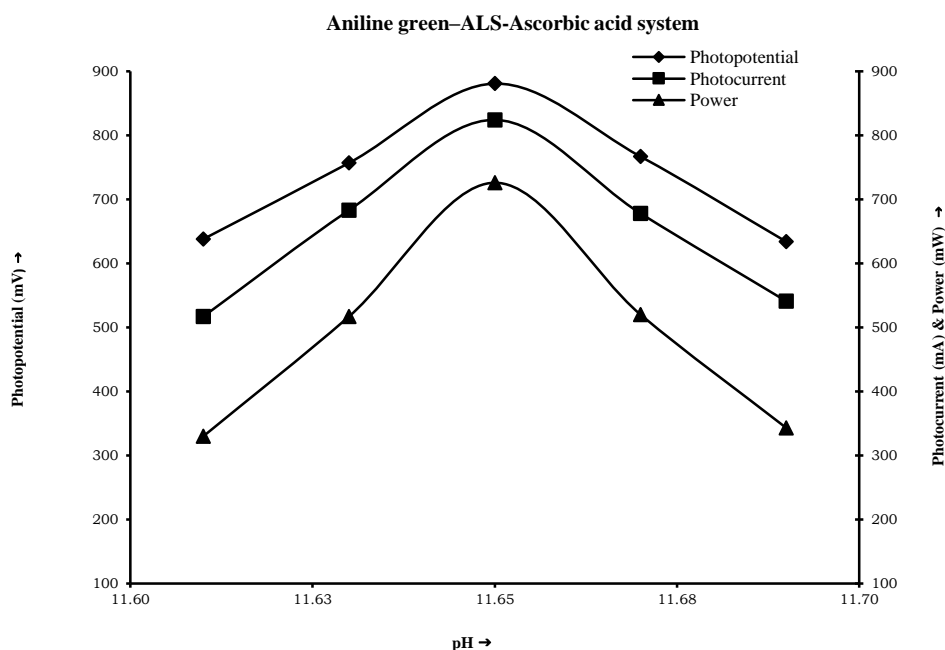


Fig. 5 VARIATION OF PHOTOPOTENTIAL, PHOTOCURRENT AND POWER WITH pH

(d) Effect of diffusion length

The current parameters of the cell i_{max} , i_{eq} and initial rate of generation of photocurrent of photogalvanic cell containing Aniline green–Ascorbic acid–ALS system was observed with change in diffusion lengths (distance between two electrodes). It was found that, with an increase in diffusion length maximum photocurrent (i_{max}) and rate of generation of current ($\mu A \text{ min}^{-1}$) go on increasing but the equilibrium photocurrent (i_{eq}) shows negligible small decreasing trends. So, virtually it may considered as unaffected by the change in diffusion length. Effect of diffusion length on electrical parameters depicted in figure 6.

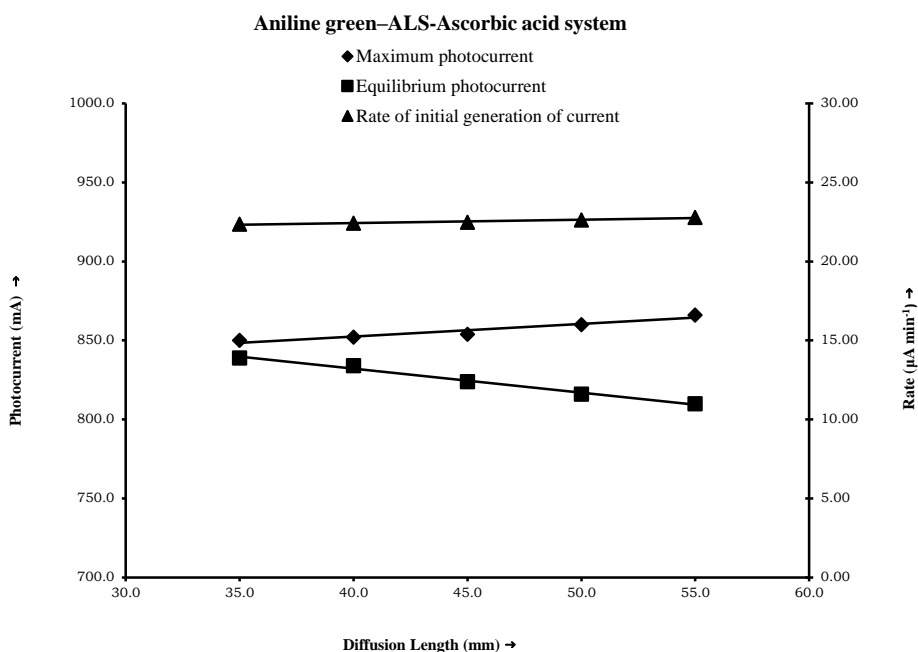


Fig. 6 VARIATION OF CURRENT PARAMETERS WITH DIFFUSION LENGTH

(e) Current voltage (i-V) characteristics of the cell

The Current–Voltage (i-V) characteristics of the photogalvanic cells containing Aniline green–Ascorbic acid–ALS system is graphically represented in Figure 7. Photogalvanic cell containing Aniline green–Ascorbic acid–ALS system, the short circuit current (i_{sc}) and open circuit voltage (V_{oc}) were measured with the help of a microammeter (keeping the circuit closed) and with a digital pH meter (keeping the other circuit open), respectively. The highest value of photopotential and photocurrent were observed with the help of a carbon pot (log 470 K) connected in the circuit of microammeter, through which an external load was applied. It was observed that current voltage curve deviated from their regular rectangular shape. A point in i-V curve called power point (pp) was determined where the product of current and potential was maximum and fill factor was calculated using the formula

$$Fill\ factor\ (\eta) = \frac{V_{pp} \times i_{pp}}{V_{oc} \times i_{sc}}$$

The value the fill-factor was calculated as 0.09389 using the formula and the power point of cell(pp)=80.85 μ W was obtained on the system. Where V_{pp} and i_{pp} represent the value of potential and current at power point, respectively. It was noticed that i-V curve was deviated from regular rectangular shape.

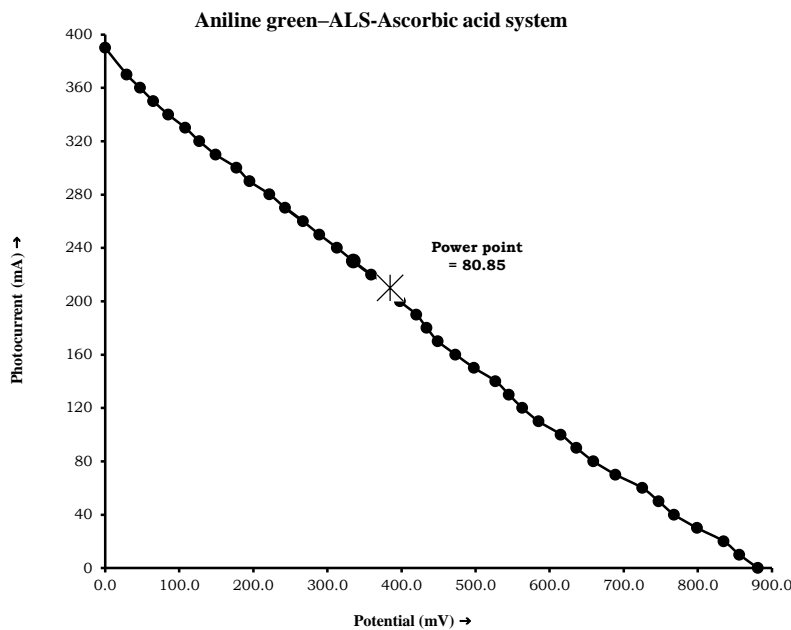


Fig. 7 CURRENT VOLTAGE (i-V) CURVE OF THE CELL

(f) Cell performance and conversion efficiency

The conversion efficiency of the cell was determined by using the formula given bellow.

$$\text{Conversion efficiency} = \frac{V_{pp} \times i_{pp}}{10.4mWcm^{-2}} \times 100\%$$

The performances of the photogalvanic cell determined in terms of $t_{1/2}$ time required to fall the power to its half at its power point in dark .cell can works 110 minutes in the dark. The result is reported in table 4 and is graphically represented in time-power curve (Figure 8).

Table-4

Perormance of the PG cell

[Aniline green] = 19×10^{-6} M
 [Ascorbic acid] = 13×10^{-4} M
 [ALS] = 14×10^{-4} M

Light Intensity = $10.4 mW cm^{-2}$
 Temperature = 303 K
 pH = 11.65

Time (Min.)	Power (μ W)
0	80.85
10	76.44
20	72.28
30	67.85
40	63.21
50	60.10
60	55.81

70	52.22
80	48.35
90	45.23
100	42.50
110	40.50
120	37.14
130	32.32
140	29.25
150	25.25
160	22.58

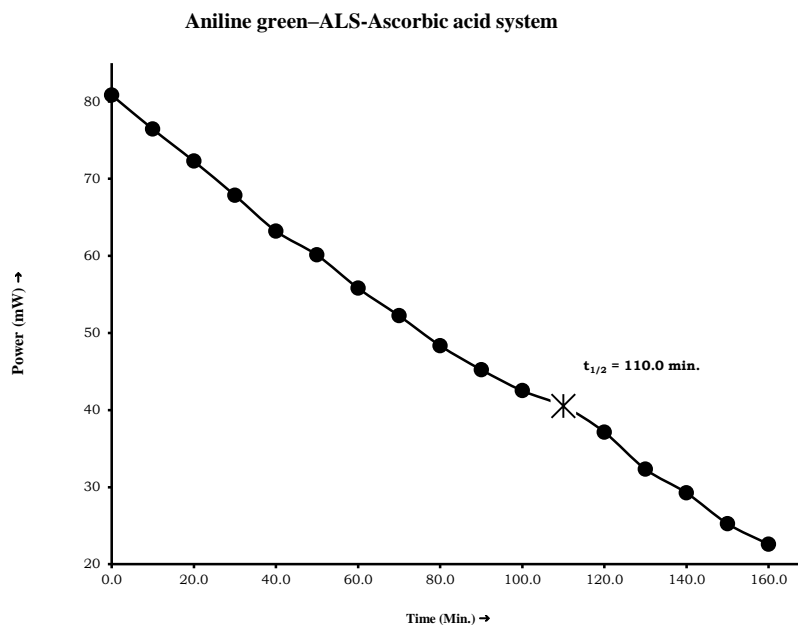


Fig. 8 TIME-POWER CURVE OF THE CELL

Conclusion

A photogalvanic cell has low conversion efficiency but has additional advantage of inbuilt storage capacity. Research should be focused on making these cell commercial viable by enhancing their conversion efficiency using appropriate combination of Dye surfactant, as these are low cost and easy to fabricate. Aniline green dye is cationic in nature and its combination with anionic surfactant ALS gives encouraging result. The highest value of V_{oc} (1045 mV), i_{sc} (824 μ A), power (80.85 μ W), fill factor (0.09389), conversion efficiency (0.77 %) and storage capacity (110.0 min.) was obtained in Aniline green–Ascorbic acid–ALS system. Therefore, it may be concluded that efficient photogalvanic cell can be fabricated with the use of Aniline green–Ascorbic acid–ALS system in cell for energy conversion and performance point of view.

References

1. E.K. Rideal and E.G. Williams, The Action of Light on the Ferrous Iodine Iodide Equilibrium, *J. Chem. Soc. Trans.*, **127**, 258–269 (1925)
2. E. Rabinowitch, The Photogalvanic Effect I: The Photochemical Properties of the Thionine-Iron System, *J. Chem. Phys.*, **8**, 551–559 (1940)
3. E. Rabinowitch, The Photogalvanic Effect II: The Photogalvanic Properties of Thionine-Iron System, *J. Chem. Phys.*, **8**, 560–566 (1940)
4. Tamilarasan R. and Natrajan P., *Indian J. Chem.*, **20A**, 213 (1981)
5. Murthy A.S.N. and Reddy K.S., Studies on photogalvanic effect in system containing Toluidine blue, *Solar Energy*, **30** (1), 39-43 (1983)
6. Rohatgi-Mukherji K.K., Roy M., and Bhowmik B.B., Photovoltage Generation of the Phenosafranine Dye-EDTA Sandwich Cell, *Solar Energy*, **31**, 417–418 (1983)
7. Ameta S.C., Ameta R., Sharma D. and Dube T.D., *J. Indian Chem.*, **15**, 377 (1987)
8. Ameta S.C., Khamesra S., Jain N.K. and Gangotri K.M., *Pol. J. Chem.*, **65**, 1415 (1991)
9. Gangotri K.M., Genwa K. R., Kalla P., Regar O.P., Lal C. and Meena R., Photogalvanic Cells as a Device for Solar Energy Conversion and Storage, *Asian J. Chem. Reviews.*, **5**, 69 (1994)
10. Gangotri K.M., Regar O.P., Lal C., Kalla P. and Meena R., Use of micelles in photogalvanic cell for solar energy conversion and storage: Toluidine blue-glucose-Acetyl pyridinium chloride system, *The Arabian J. Sci. Engg.*, **22** (1A), 115-118 (1997)
11. R.C. Meena and G. Singh, “Use of dyes in photogalvanic cell for solar energy conversion and storage: Methyl orange and ascorbic acid system”, *Res. J. Chem. Environ.*, **9**, 90-93 (2005).
12. Genwa K.R. and Chouhan A., Role of heterocyclic dye (Azur A) as a photosensitizer in photogalvanic cell for solar energy conversion and storage: NaLS-ascorbic acid system, *Solar Energy*. **80** (9), 1213-1219 (2006)
13. K.R. Genwa and Abhilasha Sonel, “Photogalvanic Cell: Study of Toluidine Blue - Arabinose - CPC System in view of Electrical Parameters”, *Bull. Electrochemistry*, **23**, 5 (2007)
14. K.R. Genwa and Arun Kumar, “Studies in Nile blue-NaLS system for solar energy conversion and management: Photogalvanic performance and conversion efficiency”, *J. Indian Council Chem.* **26**, 181 (2009).
15. K.R. Genwa, C. Lal and R.S. Sindal, “Role of Ascorbic acid in photogalvanic solar cell containing Crystal violet-Dioctyl sulphosuccinate system and to study energy efficiency of the cell”, *Energy Sources Part A*, (2011).
16. Genwa K.R. and Singh K., Development of photogalvanic cell and its application in solar energy conversion and storage *Int. J. Chem.*, **1** (4), 542-549 (2012)
17. Genwa K. R. and Singh K., Optimum efficiency of Photogalvanic cell for solar energy conversion: Lissamine green B-ascorbic acid-NaLS System, *Smart Grid and Renewable Energy* **4**, 306-311 (2013)
18. Genwa K. R. and Singh K., Use of Bromocresol green- ascorbic acid-NaLS System in photogalvanic cell for solar energy conversion and storage, *J. Indian Chem. Soc.*, **90**, 813-819 (2013)

19. Genwa K. R. and Sagar C. P., Xylidine ponceau dye based photogalvanic cell: Energy conversion for sustainable development. *Eur. Chem. Bull.* **3**, 76-80 (2014)
20. Rathore J., Pareek R. K. and Singh K., Significance of Aniline blue in liquid phase dye sensitized Photo Galvanic cell for Solar power generation and Storage by using Ascorbic acid and Sodium Lauryl Sulphate chemicals. *Res. J. Chem. Environ.* **26**, **3**, 45-53 (2022).
21. Rathore J., Pareek R. K. and Singh K., Natural dye Curcumin based Photogalvanic Solar Cell- Conversion and storage of solar energy into electrical energy for sustainable development. *Journal of Emerging Technologies and Innovative Research.* **9**, **5**, a 235-a247 (2022).
22. Yadav S. K., Dye Sensitized Solar Cell Based on A New Class Of Doubly Concerted Companion Dyes, *Int. J. Adv. Res. E.E. Ins.Eng.* **11**, **11**, 3572-3579 (2022).
23. Yadav S. K., Ram R., Bhandari H. S. and Sonel A., Compared of Solar Energy Conversion and Storage with Reductants and Bismarck Brown, *Environment: The Global Scenario*, 124.
24. Prakash Om and Yadav S. K., Study of Photogalvanic Effect by Using of Natural Dye as Photosensitizer for Solar Energy Conversion and Storage, *Cent. Asia. J. Theo. App. Scie.* **3**, **7**, 2660-5317 (2022).